



Technical Manual

Manufacturer - Midwest Pressure Systems, Inc.
Model 43AAV34-AC
Gas Pressure Booster

Customer - Order Number - Serial Number -


Prepared May 2, 2018

Table of Contents

- 1. Design Specifications**
- 2. Materials of Construction and Torque Specifications**
- 3. Flow Curves**
- 4. Boost Cylinder Operation**
- 5. Drive Air System Operation**
- 6. Installation**
- 7. Startup**
- 8. Operation**
- 9. Maintenance & Warranty**
- 10. General Arrangement Drawing**
- 11. Booster Assembly Drawing**

1 Design Specifications

Midwest Pressure Systems, Inc. (MPS) air pressure boosters are designed for ease of operation and maintenance. Experience has shown that an MPS booster will normally provide years of satisfactory performance with minimal maintenance. Carefully review this manual which is designed to provide information on installation, start up, operation and maintenance. If you have questions, please contact Midwest Pressure Systems, Inc.

Booster design meets these ATEX specifications: 

Designed in accordance with ASME Boiler and Pressure Vessel Code, Section VIII, Division 1

Model 43AAV34-AC Engineering Specifications	
Maximum gas discharge pressure - psi (bar)	493 (34)
Gas temperature range - °F (°C)	-15 to 250 (-26 to 121)
Maximum cycle rate - cycles per minute (Note 1)	100
Gas displacement per cycle - cf (liters)	.038 (1.07)
Maximum gas displacement - cfm (liters per minute)	3.8 (107)
Pressure boost (multiple of drive air pressure) (Note 2)	1.4
Gas inlet and discharge connections FNPT	1/4
Seal vent connection FNPT	1/8
Maximum drive pressure - psi (bar) (Note 3)	125 (8.6)
Air temperature range - °F (°C)	32 to 167 (0 to 75)
Air displacement per cycle - cf (liters)	.069 (1.95)
Maximum air displacement - cfm (liters per minute)	6.9 (195)
Drive air inlet connection FNPT	1/2
Drive air exhaust connection FNPT	1/2
Drive air cylinder bore diameter - inches (millimeters)	4 (102)
Gas boost cylinder bore diameter - inches (millimeters)	3 (76.2)
Piston rod diameter - inches (millimeters)	.625 (15.9)
Stroke - inches (millimeters)	4.8 (122)
Weight - pounds (kilograms)	31 (14)
Ambient Temperature - °F (°C) (Note 4)	-15 to 167 (-26 to 75)

Note 1: A cycle consists of a forward and reverse stroke.

Note 2: This is a nominal operating pressure boost ratio, not the maximum pressure boost ratio.

Note 3: Nitrogen may also be used for the drive gas.

Note 4: Where ambient temperatures fall below 0°C (32°F) a heater is required for the drive air.

2 Materials of Construction and Torque Specifications

Process gas wetted materials

Anodized Aluminum and stainless steel

Pneumatic drive materials exposed to the environment

Anodized aluminum for excellent general environmental corrosion resistance

External bolts, nuts, and washers

18-8 SS for excellent marine and general environmental corrosion resistance

Dynamic seal material

Carbon-fiber-filled Teflon piston rings and rod seals

Gas wetted static seals

Viton

Air drive seals

Buna-N

Material specifications for individual components are listed in Sections 10 and 11.

Fastener Torque Specifications




This booster utilizes high strength fasteners. Replacement fasteners must be of the same grade and material or the booster could fail and cause a fire, explosion or toxic gas release.

Fastener Description	Size Inch TPI	Type	Torque Lb-Ft (N•m)
Piston Rod Nuts	3/8-16 UNC	18-8 SS hex head locknut • 11/16 wrench	20 (27)
1" and 7" Long Screws	3/8-16 UNC	18-8 SS socket head cap screw • 5/16 wrench	15 (20)
Air Manifold Mounting Screws	10-32 UNC	18-8 SS socket head cap screw • 5/32 wrench	3.3 (4.5)
Control Valve Mounting Screws	1/4-20 UNC	18-8 SS socket head cap screw • 3/16 wrench	7.9 (10.7)


3 Flow Curves

The graph below shows the performance curve of the 43AAV34-AC air pressure booster. In the graph, the drive and supply pressures are equal. Use this curve to size the 43AAV34-AC air pressure booster for a given application.

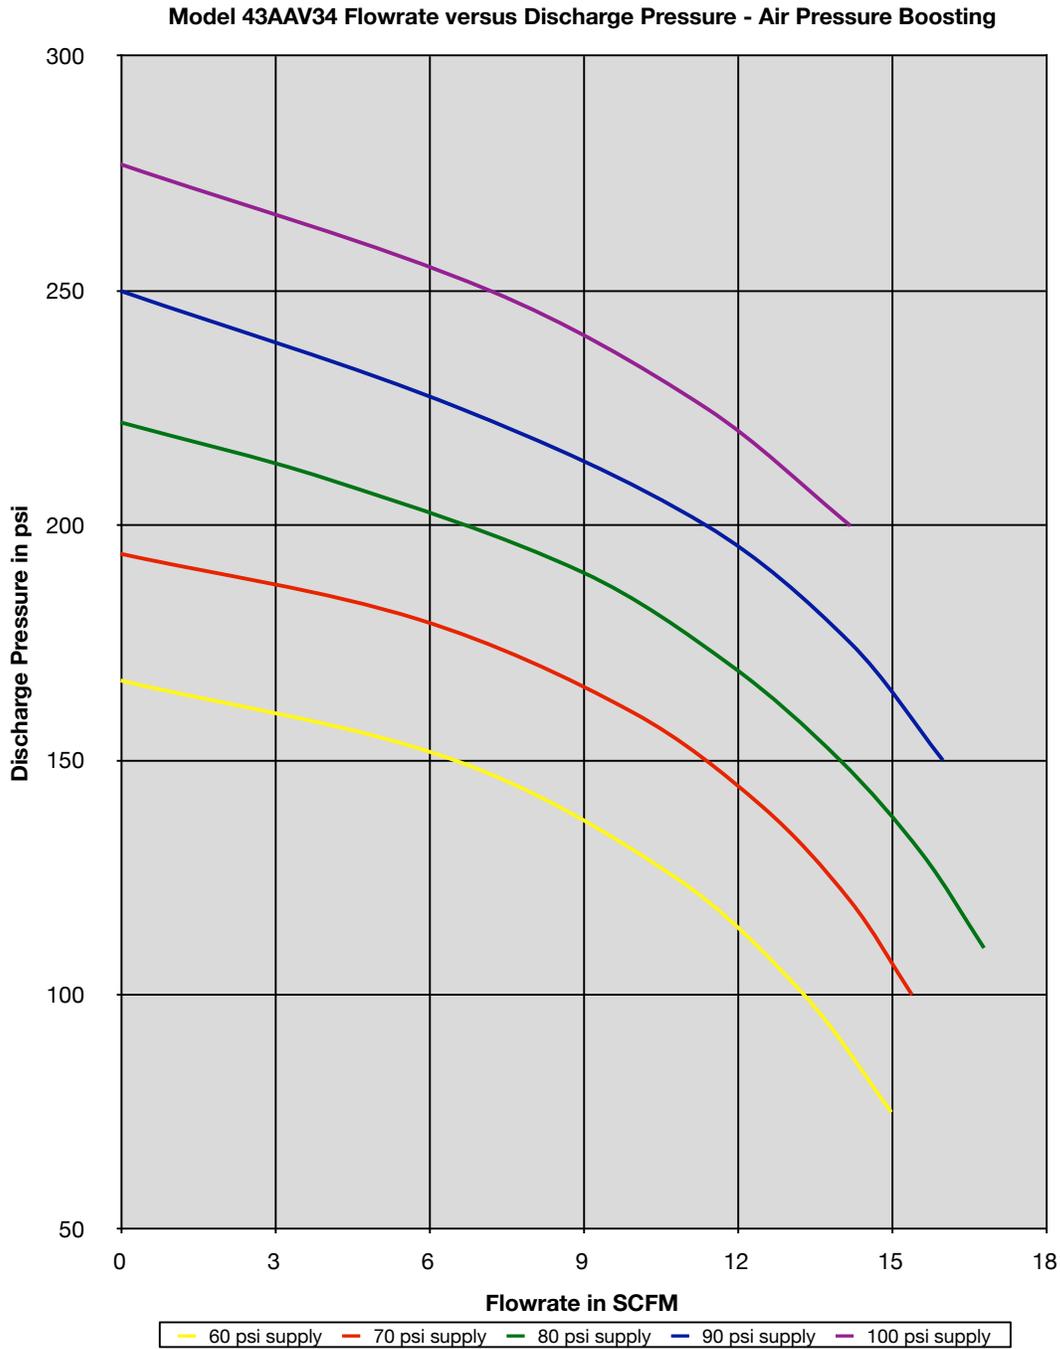

3 Flow Curves

The graph below shows a performance curve of the 43AAV34-AC air pressure booster. In the graph, the drive air pressure is held constant at 80 psi and process air supply pressures vary as shown below. Use this curve to size the 43AAV34-AC air pressure booster for a given application.

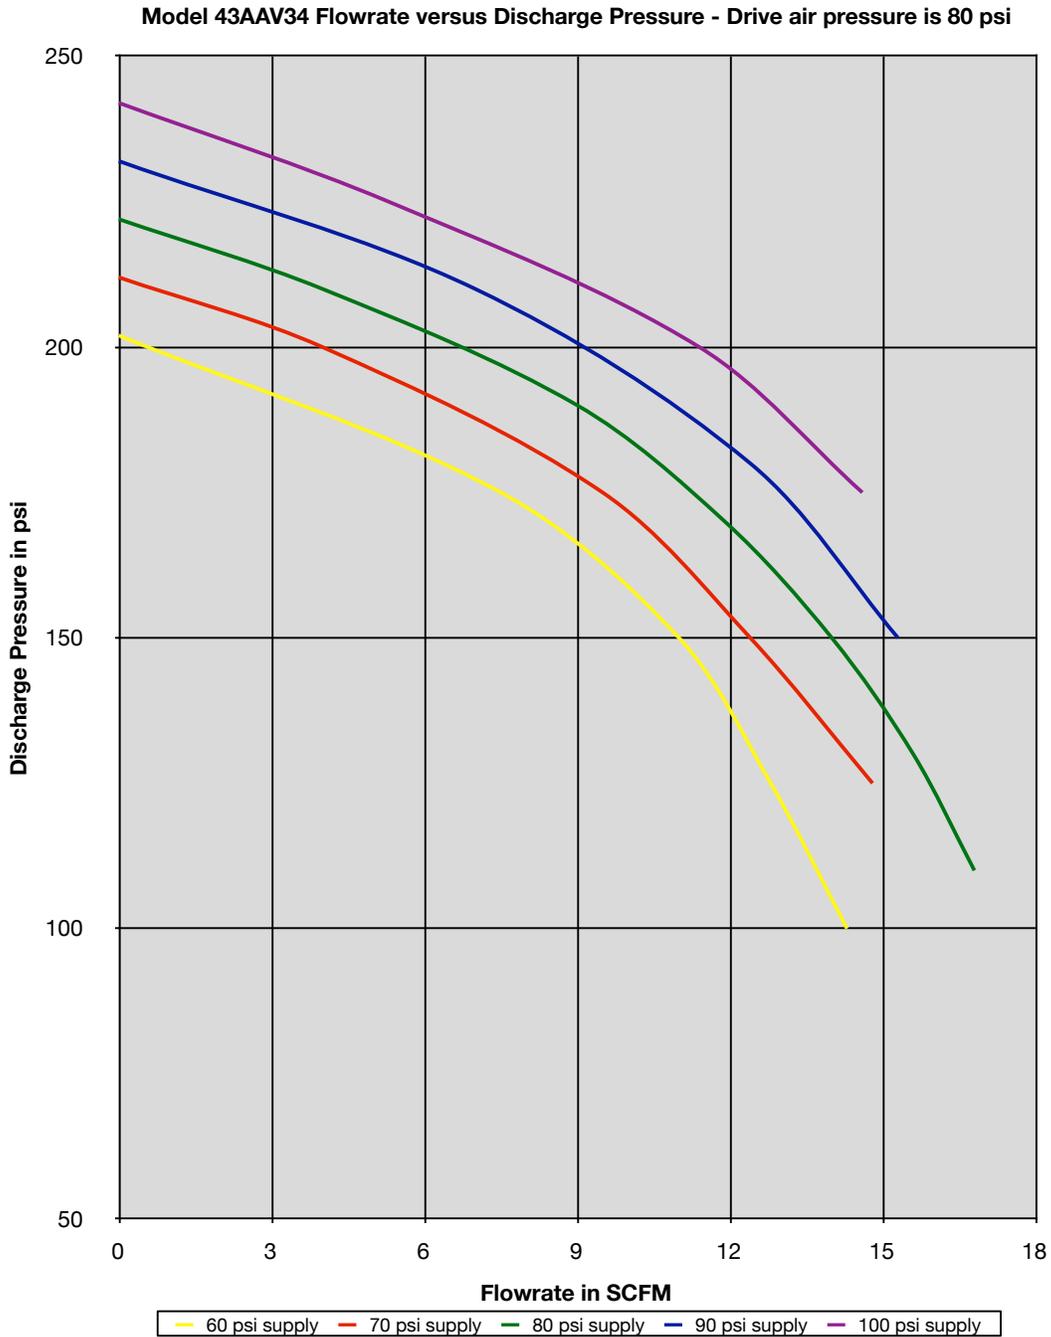


4 Boost Cylinder Operation

The piston in the drive cylinder is attached to the piston in the boost cylinder. As the drive piston reciprocates, it compresses the gas in the boost cylinder. The controls which cause the drive cylinder to reciprocate are described in Section 4 entitled, “Drive Air System Operation”.


The boost cylinder is double-acting, i.e., it pulls gas in on one side while pumping it out on the other. The maximum pressure boost is equal to the drive piston area divided by the boost piston area multiplied by the pressure feeding the drive cylinder. At this maximum boost pressure, the forces in the booster are balanced and the booster stalls. This booster has a four inch diameter drive piston and a three inch diameter boost piston resulting in an area ratio of 1.77. With an 80 psi air supply it can attain a maximum boost pressure of 141 psi. If the gas supply pressure is 80 psi, the maximum discharge pressure would be 221 psi and the booster would stall. When the discharge pressure drops below 221 psi, the booster will start pumping.

An external manifold connects the two inlet check valves and an external manifold connects the two discharge check valves. There is one inlet and one discharge gas connection. An alternative inlet and discharge connection is plugged. If use of the plugged connections is more convenient for piping purposes, the plugs may be removed and installed on the open ports thereby changing the location of the inlet and discharge piping connections.

The pistons below are traveling to the right and compressing the gas in chamber “B” while pulling gas into chamber “A”.

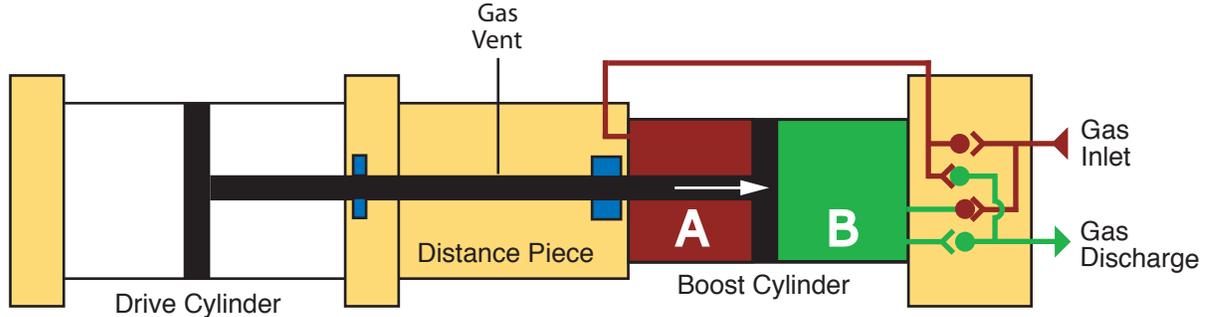

The pistons below are traveling to the left and compressing the gas in chamber “A” while pulling gas into chamber “B”.

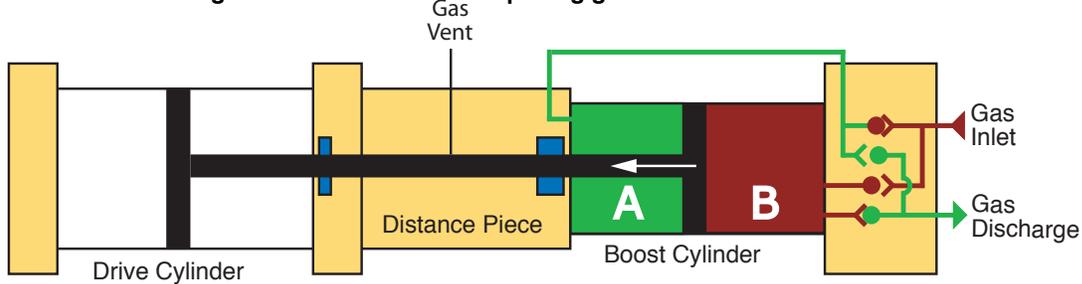


The distance piece is designed to ensure that the gas in the boost cylinder is isolated from the air in the drive cylinder. There are piston rod seals at each end of the distance piece, and the distance between the rod seals is greater than the stroke length of the booster. Consequently, the section of piston rod which penetrates the drive cylinder never penetrates the boost cylinder and vice versa.


There is one 1/8 NPT gas vent port with a breather installed. Any air that leaks past the air seal, or gas which leaks past the gas side rod seal will flow out of this vent. The unit is supplied with breathers which vent to atmosphere.

5 Drive Air System Operation

The sketch below shows the 4-way valve extended to the left. This causes drive air to fill drive cylinder chamber “B” and opens chamber “A” to exhaust. The air piston is driven to the left. The drive air supply also feeds pilot valve “A” and pilot valve “B”. Both of these valves are closed, and the pilot ports at the end of the 4-way valve are open to atmosphere through breather vent “A” and breather vent “B”. All of the piping connections shown in the sketch are machined into in the valve manifold and cylinder end caps. There is no external tubing.

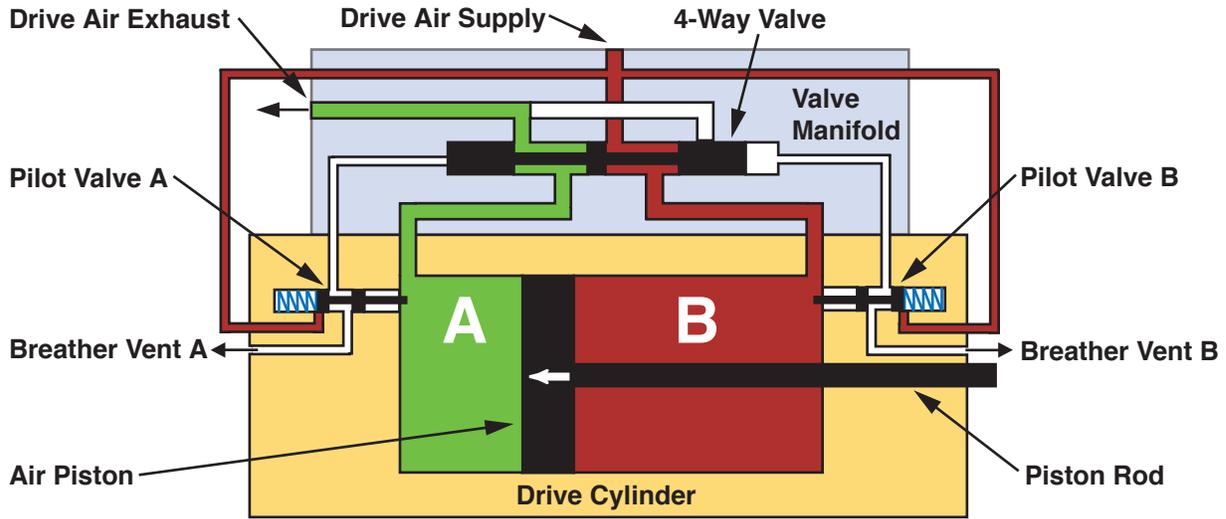

In the sketch below, the air piston has reached the end of its stroke and opened pilot valve “A”. This closes breather vent “A” and sends pilot air to the left pilot port on the 4-way valve. The 4-way valve shifts to the right, opens chamber “B” to exhaust and supplies drive air to chamber “A”. The air piston moves to the right. When the piston moves off the end cap a spring returns pilot valve “A” to its normal position which closes off the air supply and vents the pilot air from the 4 way valve. This process is repeated on the right end of the drive cylinder which causes the air piston to reciprocate automatically.

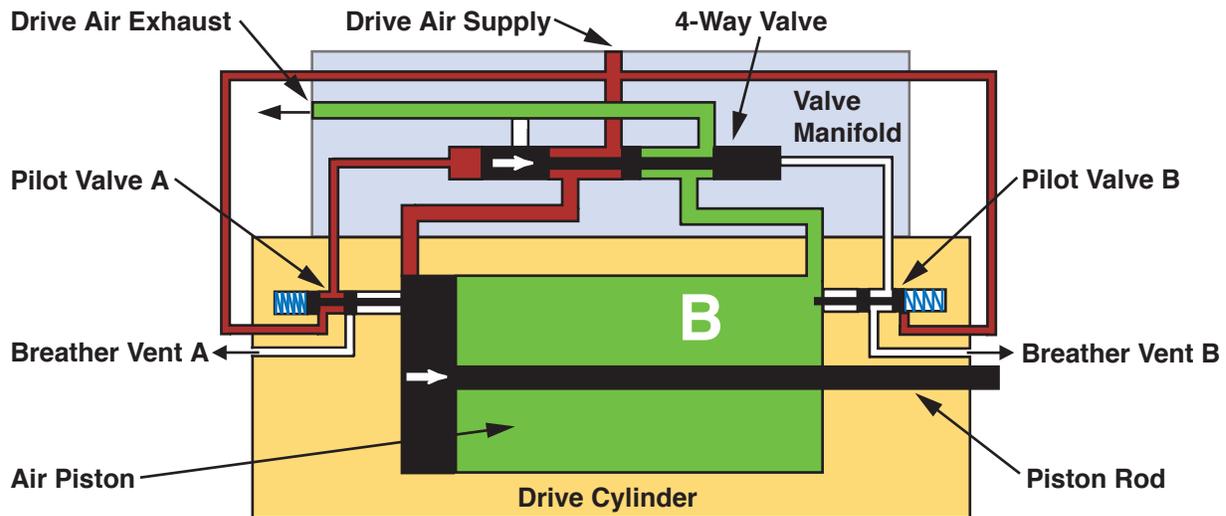

6 Installation

1 Mounting

1a The booster has mounting brackets on each end with two 13/32 inch diameter mounting holes centered on the corners of a 1.9 inch by 20.8 inch rectangle. The booster can be mounted in any orientation using 3/8 inch mounting bolts.



The booster must be well-supported. Inadequate mounting supports can put stress on the piping connections. Piping stresses can cause a gas leak which could result in a leak or explosion.

2 Air Supply Connection

2a The drive air line connection is 1/2 female NPT. The piping should be installed to prevent stresses from acting on the air inlet port which could cause a pilot leak and booster operating failure. The booster drive air must be ISO 8573.1 CLASS 2 or better. Lower quality air can cause the formation of ice in the cycling valve and exhaust mufflers which will cause the booster stop running or run erratically. If ambient temperatures fall below freezing, the air supply line must be heated to prevent ice formation on the exhaust mufflers which would cause the booster to stop running or run erratically.



In hazardous environments, the booster must be mounted in a manner which enables electrical continuity to ground to prevent build-up of electrostatic charge which could trigger a fire or explosion.

2b A drive air filter with a 5 micron or better rating must be installed to prevent particulates from entering the booster. Ensure that the piping or tubing installed between the filter and the booster is very clean and will not corrode. Particulates can damage the cycling valve and cause the booster to stop running. Inadequate filtration can result in premature wear of the air piston and rod seal resulting in reduced operating life. A supply air pressure regulator and pressure gauge will enable control of the drive air pressure which determines the boost pressure. A shutoff valve enables isolation of the booster from the drive air supply for maintenance.



The process air piping components must have a pressure rating suitable for the intended service. Inadequately rated connections could fail and cause a leak or explosion.



The piping connections must be installed in a manner which prevents piping stresses from acting on the booster's inlet and discharge manifolds. Stress on the manifold can cause distortion and cause a leak or explosion.

3 Process air Inlet and Discharge Connections

3a The process air inlet is branched off via a tee from the main air supply connection. The discharge ports are 1/4 inch female NPT ports. The booster piston and rod seals produce fine dust particles as they wear, consequently the discharge line may need a 5 micron or better filter to protect downstream components.



Improper seal material selection or operating temperatures outside the recommended range for the booster can cause a gas leak which will shorten the operating life of the booster.

3b There are two process air discharge ports. The booster ships with the port in the middle of the body plugged and the port at the end of the body open for connection of discharge piping. For convenience of piping location, either discharge port may be used and the other port plugged.



This booster can raise the pressure of the inlet air supply by a maximum of 221 psi. Downstream components must be rated to meet this pressure or be protected by a safety relief device.

3c If the maximum boost pressure of 493 psi (34 bar) can exceed the pressure rating of downstream components or piping, a safety relief valve must be installed. Installation of a pulsation dampener on the discharge line will reduce the amplitude of the pressure pulsations generated by the booster.

4 Vent Line Connection

4a The vent line port is 1/8 inch female NPT.

4b The booster rod seals are not bubble tight. The small amount of air leakage that occurs flows to the vent port. This leakage rate is typically 0.5 to 0.2 standard cubic feet per hour.

7 Startup

1 Supply air to the Booster

1a The maximum allowable working pressure for the boost section of the assembly is 493 psi (34 bar). The discharge pressure of the booster is calculated by multiplying the drive air pressure by 1.77 and adding that number to the boost supply pressure (i.e., If the drive pressure is regulated to 80 psi and the process air supply is 100 psi, then the maximum discharge pressure will be $(1.77 \times 80) + 100 = 242$ psi). Make sure the booster's discharge pressure will not exceed 493 psi (34 bar). Supply air to the booster. The air should flow through the inlet check valves, boost cylinder, and discharge check valves. If it does not, check to make sure the supply and discharge lines are connected to the correct ports. Check the process air wetted components for leaks.



Operating temperatures or pressures outside the recommended range for the booster can cause a leak or explosion.

2 Supply Drive Air to the Booster

2a The air section of the booster is rated for a maximum of 125 psi. Make sure that the maximum value will not be exceeded. Supply drive air to the booster by opening up the regulator. The booster will begin to cycle. If the process air discharge line is closed, the booster will pressurize the discharge line to the maximum boost pressure described in the "Boost Cylinder Operation" section of this manual and stop cycling. If there is discharge flow, the booster will automatically cycle as fast or slow as necessary to meet the required flow rate, as long as the flow requirement is within the operating envelope of the booster. While the booster is cycling, check the drive air wetted components for leaks.

8 Operation

1 Operating Conditions

1a Insulate the booster and piping if the operating temperature is high enough to create a burn or ignition hazard.

1b Make sure the drive air exhaust silencer is installed. Boosters without a silencer can produce sound levels above 85 decibels.



High operating temperatures may cause burns as workers come into contact with the booster and associated piping.

2 Operating Characteristics

2a The booster will reciprocate as long as drive air is supplied and process air flow is required. The booster cycle rate will automatically adjust to meet the required flow rate.



High operating temperatures may be an ignition source which could cause a fire or explosion.

3 Operating Life

3a The operating life of the booster seals is related to the distance the seals travel. At a 70 cycle per minute operating speed, the booster seals can provide over 2000 hours of service.



Operation of the booster without the drive air exhaust silencer may cause hearing damage to exposed workers.

4 Rod Seal Leakage

4a The booster rod seal is not bubble tight. The process air leakage that occurs flows to the vent port and must be piped to a safe location. In a new booster, process air leakage is less than 0.1 standard cubic feet per hour.

9 Maintenance and Warranty

1 Lubrication

1a All of the booster dynamic seals are carbon fiber filled Teflon and the control valve dynamic components are made from honed and lapped stainless steel with no elastomeric seals. No lubrication of any kind is required for the booster.

2 Filters

2a The booster air supply filter elements should be replaced periodically.

3 Repairs

3a The booster seals and valves can be replaced after they have worn out. Use seal kit Model Number K43AAV34. Always perform pressure, leak and functional tests on a repaired booster before returning it to service.

3b The booster has been designed to utilize high strength fasteners. If it becomes necessary to replace any of the tie rods, tie rod nuts or socket head cap screws on the booster, the replacement fasteners must be of the same grade.

3c When rebuilding the booster, use the torque values listed in Section 2.

3d Use proper assembly and disassembly techniques. Socket head cap screws should be incrementally tightened and loosened using a cross-pattern. Static o-rings should be lightly greased to aid installation. Surfaces in contact with the filled-Teflon rod seals and piston seals should not be greased.

4 Warranty

4a Midwest Pressure Systems, Inc. warrants these boosters to be free of defects in material and workmanship for a period of one year after installation. We will either repair or replace a failed unit returned by the customer. No other warranty is expressed or implied. Proof of the installation date is required. This warranty does not apply to equipment which has been abused, and is voided by failure to use a well-maintained inlet filter.



An improperly assembled booster could cause a component failure which could result in a gas leak or explosion.



Use of the wrong fasteners on the booster could cause a gas leak or explosion.



Improper torque values can cause a failure which could result in a gas leak or explosion.