

Technical Manual

Model: 42AAV48-ACG

42AAV48-ACG - 5:1 Air/Gas Pressure Booster
Manufacturer - Midwest Pressure Systems, Inc.



Midwest Pressure Systems, Inc. • 1035 Entry Drive • Bensenville, Illinois 60106 • USA
Phone 630-766-6049 • Fax 630-766-6236 • Web Site www.midwestpressuresystems.com

Table of Contents

- 1. Design Specifications**
- 2. Materials of Construction and Torque Specifications**
- 3. Flow Curves**
- 4. Boost Cylinder Operation**
- 5. Drive Air System Operation**
- 6. Installation**
- 7. Startup**
- 8. Operation**
- 9. Maintenance & Warranty**
- 10. General Booster Arrangement Drawing**
- 11. Booster Assembly Drawing**
- 12. Booster Assembly with Air Controls**

1. Design Specifications

Midwest Pressure Systems, Inc. (MPS) gas pressure boosters are designed for ease of operation and maintenance. Experience has shown that an MPS booster will normally provide years of satisfactory performance with minimal maintenance. Carefully review this manual which is designed to provide information on installation, start up, operation and maintenance. If you have questions, please contact Midwest Pressure Systems, Inc. Model 42AAV48-ACG is designed for air, nitrogen or other inert gas pressure boosting.

Model 42AAV48-ACG Engineering Specifications	
Maximum gas discharge pressure - psi (bar)	696 (48)
Gas temperature range - °F (°C)	-15 to 200 (-26 to 93)
Maximum cycle rate - cycles per minute (Note 1)	100
Gas displacement per cycle - cf (liters)	.016 (.453)
Maximum gas displacement - cfm (liters per minute)	1.6 (45.3)
Maximum pressure boost ratio (Note 2)	5:1
Gas inlet and discharge connections FNPT	1/4"
Seal vent connection FNPT	1/8"
Maximum drive pressure - psi (bar) (Note 3)	150 (10.3)
Air temperature range - °F (°C)	32 to 167 (0 to 75)
Air displacement per cycle - cf (liters)	.069 (1.95)
Maximum air displacement - cfm (liters per minute)	6.9 (195)
Drive air inlet connection FNPT	1/2"
Drive air exhaust connection FNPT	1/2"
Drive air cylinder bore diameter - inches (millimeters)	4 (102)
Gas boost cylinder bore diameter - inches (millimeters)	2 (50.8)
Piston rod diameter - inches (millimeters)	.625 (15.9)
Stroke - inches (millimeters)	4.8 (122)
Weight - pounds (kilograms)	31 (14)
Ambient Temperature - °F (°C) (Note 4)	5 to 200 (-15 to 93)

Note 1: A cycle consists of a forward and reverse stroke.

Note 2: See Section 4 to calculate the actual boost ratio.

Note 3: Nitrogen may also be used for the drive gas.

Note 4: Where ambient temperatures fall below 0°C (32°F) a heater is required for the drive air .

2. Materials of Construction and Torque Specifications

Boost gas wetted materials

Anodized Aluminum and stainless steel

Pneumatic drive materials exposed to the environment

Anodized aluminum for excellent general environmental corrosion resistance

External bolts, nuts, and washers

18-8 SS for excellent marine and general environmental corrosion resistance

Dynamic seal material

Carbon-fiber-filled Teflon piston rings and rod seals

Gas wetted static seals

Viton

Air drive seals

Buna-N

Material specifications for individual components are listed in Sections 10 and 11.

Fastener Torque Specifications




This booster utilizes high strength fasteners. Replacement fasteners must be of the same grade and material or the booster could fail and cause a fire, explosion or toxic gas release.

Fastener Description	Size Inch TPI	Type	Torque Lb-Ft (N•m)
Piston Rod Nuts	3/8-16 UNC	18-8 SS hex head locknut • 11/16 wrench	20 (27.1)
1" and 7" Long Screws	3/8-16 UNC	18-8 SS socket head cap screw • 5/16 wrench	15 (20.3)
Air Manifold Mounting Screws	10-32 UNC	18-8 SS socket head cap screw • 5/32 wrench	3.3 (4.5)
Control Valve Mounting Screws	1/4-20 UNC	18-8 SS socket head cap screw • 3/16 wrench	7.9 (10.7)


3. Flow Curves

The graph below shows the performance curve of the 42AAV48-ACG air pressure booster. In the graph, the drive and supply pressures are equal. Use this curve to size the 42AAV48-ACG air pressure booster for a given application.

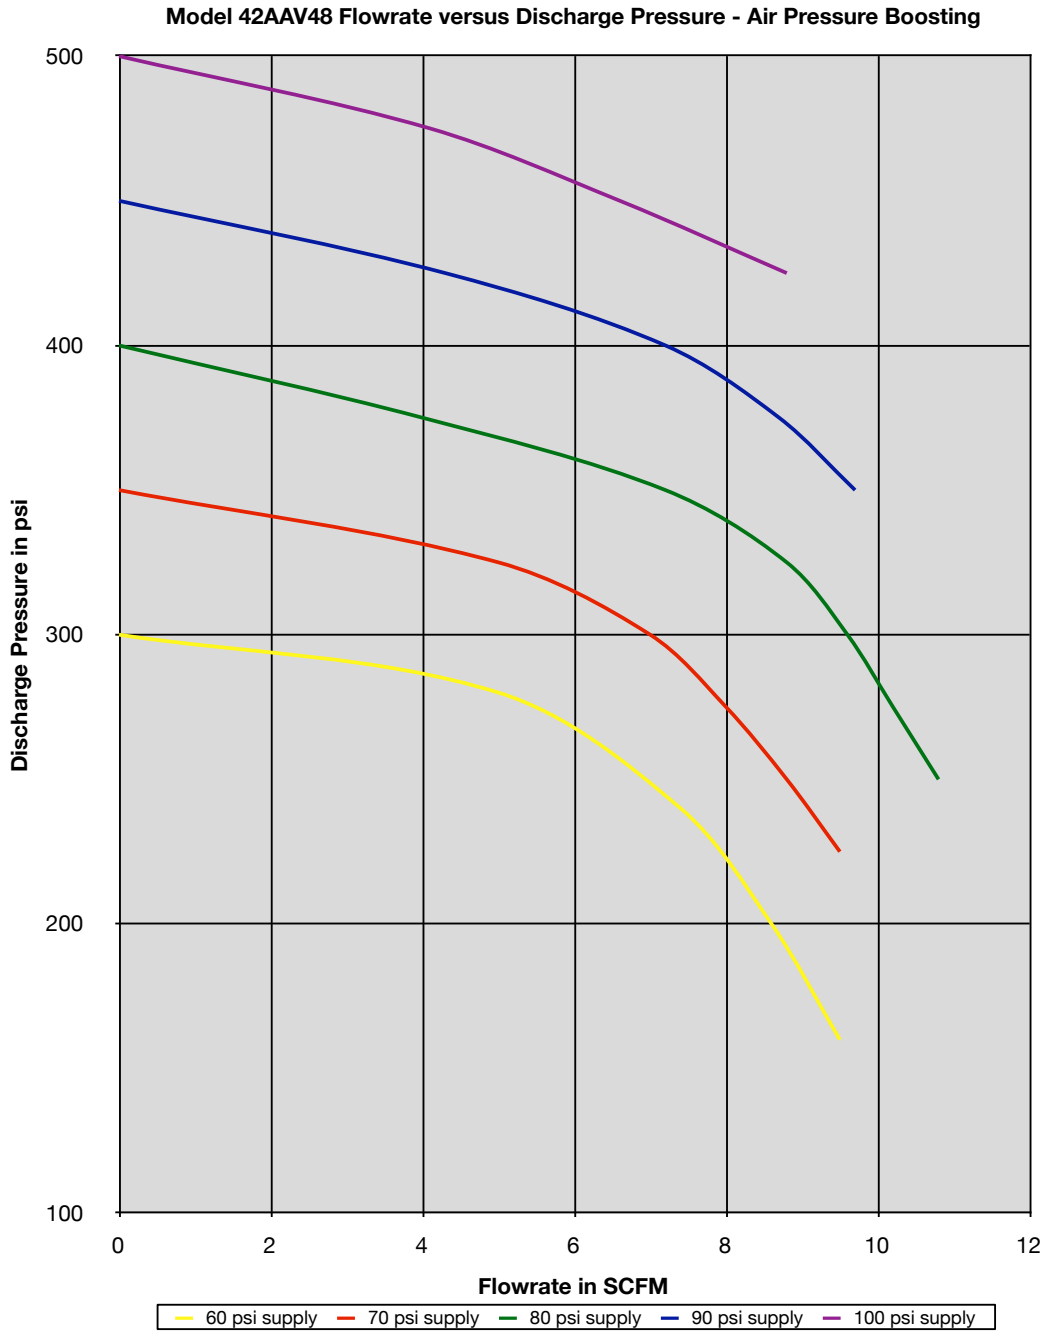

3. Flow Curves

The graph below shows a performance curve of the 42AAV48-ACG gas pressure booster. In the graph, the drive pressure is held constant at 80 psi and gas supply pressures vary as shown below. Use this curve to size the 42AAV48-ACG gas pressure booster for a given application.

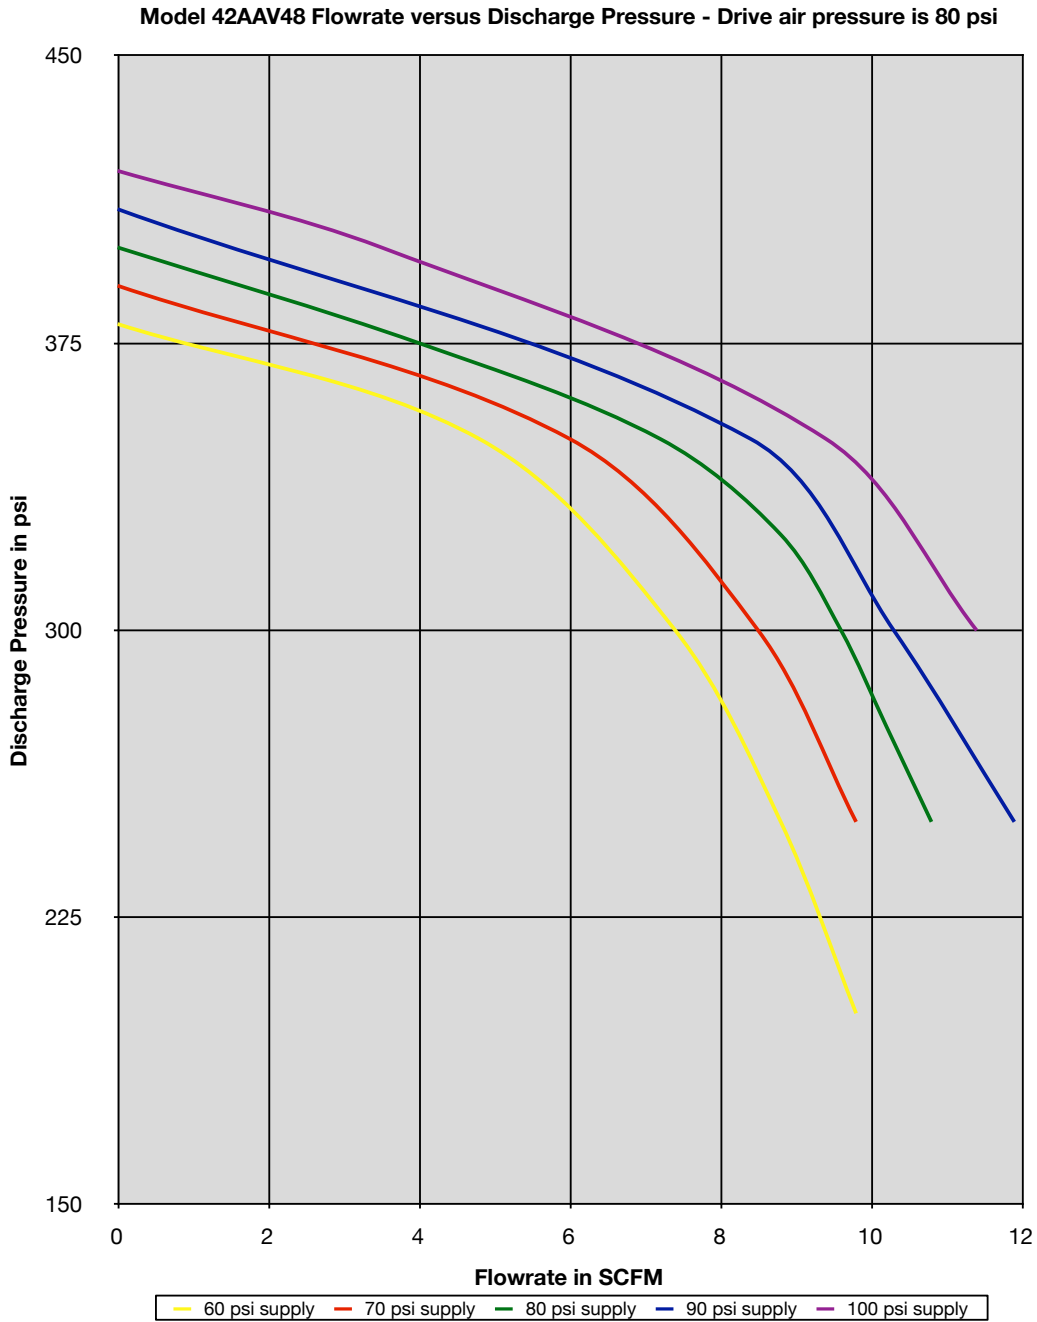

4. Boost Cylinder Operation

The piston in the drive cylinder is attached to the piston in the boost cylinder. As the drive piston reciprocates, it compresses the gas in the boost cylinder. The controls which cause the drive cylinder to reciprocate are described in Section 5 entitled, “Drive Air System Operation”.


The boost cylinder is double-acting, i.e., it pulls gas in on one side while pumping it out on the other. The maximum pressure boost ratio is equal to the drive piston area divided by the boost piston area. This booster has a four inch diameter drive piston and a two inch diameter boost piston resulting in a maximum pressure boost ratio of 4. The maximum discharge pressure (MDP) is equal to the maximum boost ratio (MBR) times the drive air pressure (DAP) plus the supply air/gas pressure (SP), see equation 1 below.

$$MDP = (MBR * DAP) + SP$$


Equation 1: Maximum Boost Pressure Equation

For example, with an 80 psi drive air pressure and an 80 psi supply gas pressure the maximum discharge pressure is 400 psi. With an 80 psi drive air pressure and a 100 psi gas supply pressure, the maximum discharge pressure would be 420 psi. When the booster attains the maximum discharge pressure, the forces in the booster are balanced and the booster stalls. When the discharge pressure drops below the maximum pressure, the booster will automatically restarts.

The pistons below are traveling to the right and compressing the gas in chamber “B” while pulling gas into chamber “A”.

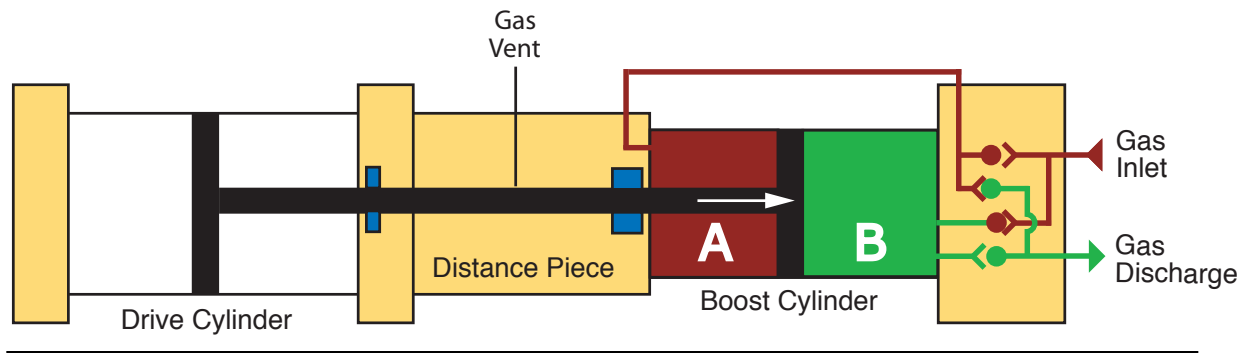

The pistons below are traveling to the left and compressing the gas in chamber “A” while pulling gas into chamber “B”.

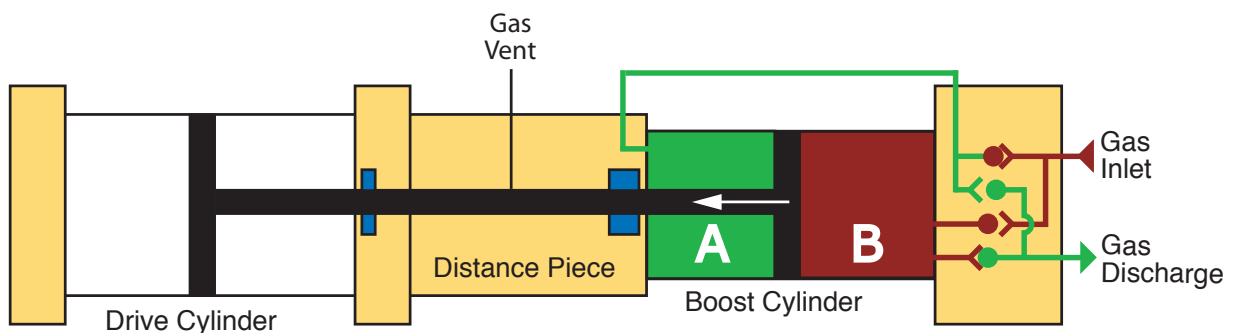


The distance piece is designed to ensure that the gas in the boost cylinder is isolated from the air in the drive cylinder. There are piston rod seals at each end of the distance piece, and the distance between the rod seals is greater than the stroke length of the booster. Consequently, the section of piston rod which penetrates the drive cylinder never penetrates the boost cylinder and vice versa.


There is a 1/8 inch NPT gas vent port with a breather installed. Any air that leaks past the air seal, or gas which leaks past the gas side rod seal will flow out of this vent.

5. Drive Air System Operation

The sketch below shows the 4-way valve extended to the left. This causes drive air to fill drive cylinder chamber “B” and opens chamber “A” to exhaust. The air piston is driven to the left. The drive air supply also feeds pilot valve “A” and pilot valve “B”. Both of these valves are closed, and the pilot ports at the end of the 4-way valve are open to atmosphere through breather vent “A” and breather vent “B”. All of the piping connections shown in the sketch are machined into in the valve manifold and cylinder end caps. There is no external tubing.

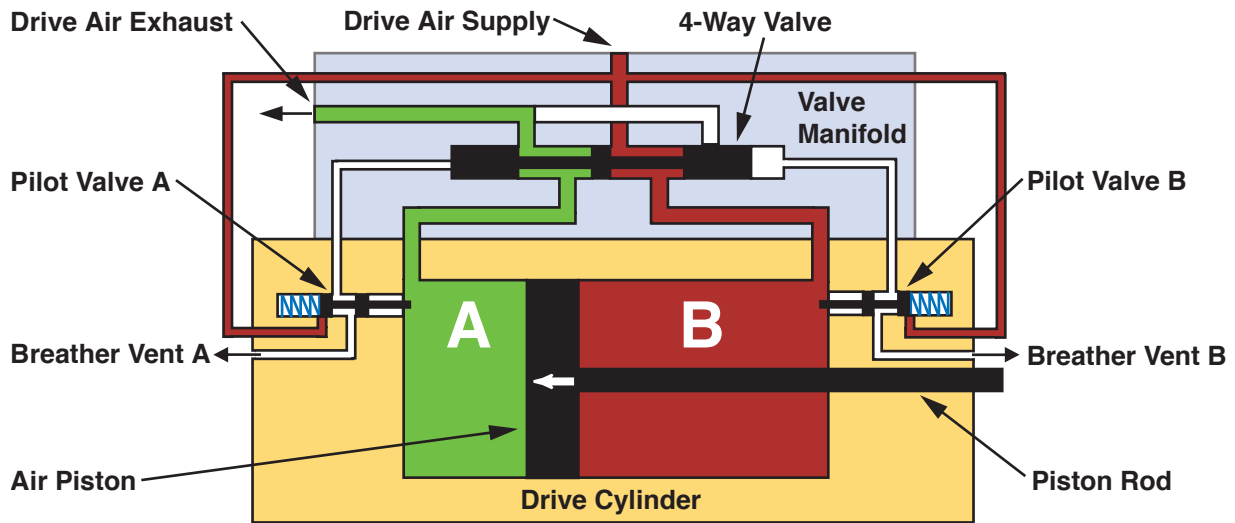

In the sketch below, the air piston has reached the end of its stroke and opened pilot valve “A”. This closes breather vent “A” and sends pilot air to the left pilot port on the 4-way valve. The 4-way valve shifts to the right, opens chamber “B” to exhaust and supplies drive air to chamber “A”. The air piston moves to the right. When the piston moves off the end cap a spring returns pilot valve “A” to its normal position which closes off the air supply and vents the pilot air from the 4 way valve. This process is repeated on the right end of the drive cylinder which causes the air piston to reciprocate automatically.

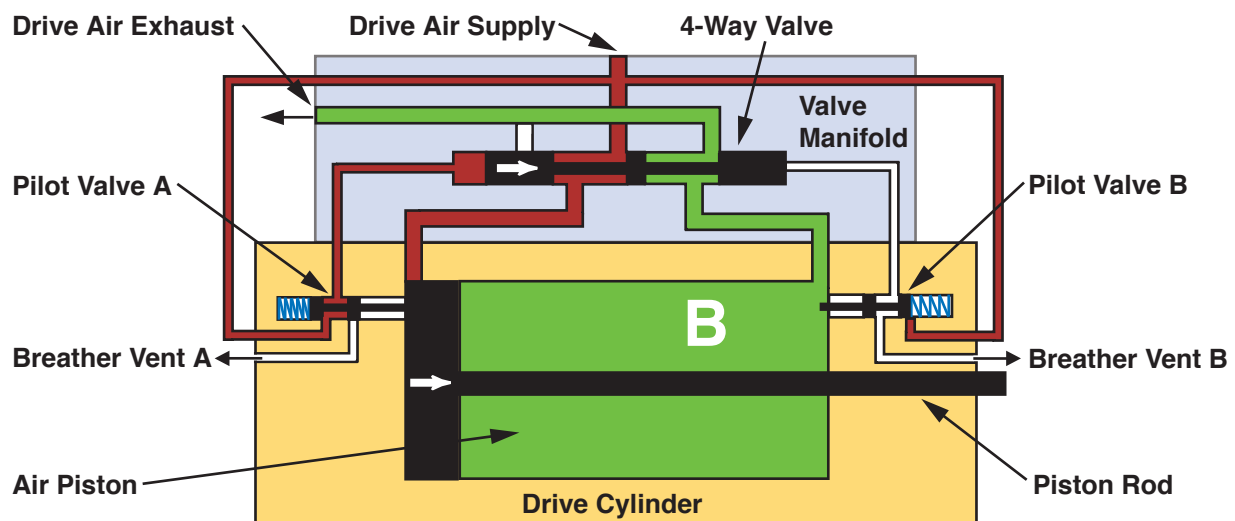

6. Installation

1 Mounting

1a The booster has mounting brackets on each end with two 13/32 inch diameter mounting holes centered at the corners of a 2.0 inch by 20.8 inch rectangle. The booster can be mounted in any orientation using 3/8 inch mounting bolts.

2 Air Supply Connection

2a The drive air line connection is 1/2 female NPT. The piping should be installed to prevent stresses from acting on the air inlet port which could cause a pilot leak and booster operating failure. The booster drive air must be ISO 8573.1 CLASS 2 or better. Lower quality air can cause the formation of ice in the cycling valve and exhaust mufflers which will cause the booster stop running or run erratically. If ambient temperatures fall below freezing, the air supply line must be heated to prevent ice formation on the exhaust mufflers which would cause the booster to stop running or run erratically.

2b A drive air filter with a 5 micron or better rating must be installed to prevent particulates from entering the booster. Ensure that the piping or tubing installed between the filter and the booster is very clean and will not corrode. Particulates can damage the cycling valve and cause the booster to stop running. Inadequate filtration can result in premature wear of the air piston and rod seal resulting in reduced operating life. A supply air pressure regulator and pressure gauge will enable control of the drive air pressure which determines the boost pressure. A shutoff valve enables isolation of the booster from the drive air supply for maintenance.

3 Gas Inlet and Discharge Connections

3a The process gas inlet and discharge ports are 1/4 inch female NPT ports.

The gas inlet must include a filter with a 5 micron or better element. This filter will protect the check valves and piston seals. Inadequate filtration can cause check valve failure preventing the booster from building pressure.

The booster piston and rod seals produce fine dust particles as they wear, consequently the discharge line may need a 5 micron or better filter to protect downstream components.

3b There are two gas inlet ports and two gas discharge ports. The booster ships with the ports in the middle of the body plugged and the ports at the end of the body open for connection of inlet and discharge piping. For convenience of piping location, either inlet or discharge port may be used and the other port plugged.

3c If the maximum boost pressure of 696 psi (48 bar) can exceed the pressure rating of downstream components or piping, a safety relief valve must be installed. Installation of a pulsation dampener on the discharge line will reduce the amplitude of the pressure pulsations generated by the booster.

4 Vent Line Connection

4a The vent line port is 1/8 inch female NPT.

4b The booster rod seals are not bubble tight. The small amount of air and gas leakage that occurs flows to the vent port. This leakage rate is typically 0.05 to 0.2 standard cubic feet per hour.



The booster must be well-supported. Inadequate mounting supports can put stress on the piping connections. Piping stresses can cause a gas leak which could result in a leak or explosion.



In hazardous environments, the booster must be mounted in a manner which enables electrical continuity to ground to prevent build-up of electrostatic charge which could trigger a fire or explosion.



The gas piping components must have a pressure rating suitable for the intended service. Inadequately rated connections could fail and cause a leak or explosion.



The piping connections must be installed in a manner which prevents piping stresses from acting on the booster gas inlet and discharge manifolds. Stress on the manifold can cause distortion and cause a leak or explosion.



Improper seal material selection or operating temperatures outside the recommended range for the booster can cause a gas leak which will shorten the operating life of the booster.



This booster can raise the pressure of the inlet gas supply by a maximum of 600 psi. Downstream components must be rated to meet this pressure or be protected by a safety relief device.

7. Startup

1 Supply Gas to the Booster

1a The maximum allowable discharge pressure for the boost section of the assembly is 696 psi (48 bar). The discharge pressure of the booster is calculated by multiplying the drive air pressure by four and adding that number to the supply pressure (i.e. If the regulated drive air pressure is 80 psi and the supply gas pressure is 100 psi, then the maximum discharge pressure will be $(4*80)+100=420$ psi). Make sure the booster's discharge pressure will not be exceed 696 psi (48 bar). Supply process gas to the booster. The gas should flow through the inlet check valves, boost cylinder, and discharge check valves. If it does not, check to make sure the supply and discharge lines are connected to the correct ports. Check the process gas wetted components for leaks.



Operating temperatures or pressures outside the recommended range for the booster can cause a leak or explosion

2 Supply Drive Air to the Booster

2a The air section of the booster is rated for a maximum of 150 psi. Make sure that the maximum value will not be exceeded. When drive air is supplied to the booster the booster will begin to cycle. If the process gas discharge line is closed, the booster will pressurize the discharge line to the maximum boost pressure described in the "Boost Cylinder Operation" section of this manual and stop cycling. If there is discharge flow, the booster will automatically cycle as fast or slow as necessary to meet the required flow rate, as long as the flow requirement is within the operating envelope of the booster. While the booster is cycling, check the drive air wetted components for leaks.



Operating with drive air pressures above 135 psi it is possible to exceed pressures above the maximum allowable discharge pressure of 696 psi (48 bar). Be careful when working with shop air pressures above 135psi for it could result in booster failure or explosion.

8. Operation

1 Operating Conditions

1a Insulate the booster and piping if the operating temperature is high enough to create a burn or ignition hazard.

1b Make sure the drive air exhaust silencer is installed. Boosters without a silencer can produce sound levels above 85 decibels.



High operating temperatures may cause burns as workers come into contact with the booster and associated piping.

2 Operating Characteristics

2a The booster will reciprocate as long as drive air is supplied and process gas flow is required. The booster cycle rate will automatically adjust to meet the required flow rate.



High operating temperatures may be an ignition source which could cause a fire or explosion in a hazardous location.

3 Operating Life

3a The operating life of the booster seals is related to the distance the seals travel. At a 70 cycle per minute operating speed, the booster seals can provide over 2000 hours of service.



Operation of the booster without a drive air exhaust silencer may cause hearing damage to exposed workers.

4 Rod Seal Leakage

4a The booster rod seals are not bubble tight. The process gas leakage that occurs flows to the vent port. This leakage rate is typically 0.5 to 0.2 standard cubic feet per hour.

9. Maintenance and Warranty

1 Lubrication

1a All of the booster dynamic seals are carbon fiber filled Teflon® and the control valve dynamic components are made from honed and lapped stainless steel with no elastomeric seals. No lubrication of any kind is required for the booster.

2 Filters

2a The booster air and gas supply filter elements should be replaced periodically.

3 Repairs

3a The booster seals and valves can be replaced after they have worn out. Use seal kit Model Number K42AAV48. Always perform pressure, leak and functional tests on a repaired booster before returning it to service.

3b The booster has been designed to utilize high strength fasteners. If it becomes necessary to replace any of the socket head cap screws on the booster, the replacement fasteners must be of the same grade.

3c When rebuilding the booster, use the torque values listed in Section 2.

3d Use proper assembly and disassembly techniques. Socket head cap screws should be incrementally tightened and loosened using a cross-pattern. Static o-rings should be lightly greased to aid installation. Surfaces in contact with the filled-Teflon® rod seals and piston seals should not be greased.

4 Warranty

4a Midwest Pressure Systems, Inc. warrants these boosters to be free of defects in material and workmanship for a period of one year after installation. We will either repair or replace a failed unit returned by the customer. No other warranty is expressed or implied. Proof of the installation date is required. This warranty does not apply to equipment which has been abused, and is voided by failure to use a well-maintained inlet filter.



An improperly assembled booster could cause a component failure which could result in leak or explosion.



Use of the wrong fasteners on the booster could cause a gas leak or explosion.



Improper torque values can cause a failure which could result in a leak or explosion.

REV	DESCRIPTION	DATE	APPROVED
1	Added breathers & changed manifold lengths	12/13/2010	CMA
2	Added AB302 Spool Valve Assembly	1/12/2011	CMA

Item	Part Number	Description	Qty	Material
1	2024S06	3/8-16 by 7 SHCS	8	18-8 SS
2	2024W07	High collar lockwasher	16	18-8SS
3	P0392	Bracket	2	304SS
4	P0390	Valve Cover	4	Aluminum
5	2024S07	3/8-16 by 1 SHCS	8	18-8 SS
6	1008L05	1/2 NPT Street Ell	1	Brass
7	1008M04	Muller	1	Polyethylene
8	P0385	Manifold Tube	2	316 SS
9	1004P02	1/4 NPT socket plug	1	Brass
10	1002M02	1/8 NPT Breather	3	316 SS
11	P0383	DP Cap Manifold	1	Aluminum
12	P0408	Center Manifold	1	Aluminum
13	2301S03	3/16" Ball Plug	1	SS
14	6200N01K	4-Way Valve	1	Aluminum
15	P0406	Air Cap Manifold	1	Aluminum
16	P0003	42AAV48 Label	2	Polyester
17	2016S06	1/4-20 by 1.75 SHCS	2	18-8 SS
18	2016W01	1/4 Hi-collar lockwasher	7	18-8 SS
19	2016S11	1/4-20 by 2.25" SHCS	5	18-8 SS
20	2012W02	10-32 hi-collar lockwasher	4	18-8 SS
21	2012S06	10-32 by 1.5 SHCS	4	18-8 SS

Dimensions shown in drawing: 22.7, 20.8, 2.9, 2.7, 2.0, 0.9, 1.4, 5.9, 6.0, 2.8, 3.7, 9.0, 2.5, 6.1.

Callouts: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21.

Notes:

- 1/4 NPT Discharge Port
A 1/4 inch NPT inlet port is at the same location on the opposite side.
- Plugged alternate discharge port location. An identical plugged inlet port is at the same location on the opposite side.

SIGNATURES		DATE
DRAWN	RAV	12/11/09
CHECKED		
ENGINEER		
ISSUED	RAV	12/11/09

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS - 2 PLACES MIN. 3 PL DECIMALS ± 0.003 ANGLES $\pm 0.5^\circ$ FRACTIONS $\pm 1/16$ MATERIAL:	
--	--

MPS Midwest Pressure Systems, Inc. 1035 Entry Drive • Bensenville, IL 60106	
General Arrangement	
SCALE	DWG NO 42AAV48
SHEET 1 of 2	REV 2


REV	DESCRIPTION	DATE	APPROVED
1	Added breathers & changed manifold lengths Added AB302 Spool Valve Assembly	12/13/2010	CMA
2		1/12/2011	CMA

Item	Part Number	Description	Qty	Material
18	2016W01	1/4 Hi-collar lockwasher	7	18-8 SS
19	2016S11	1/4-20 by 2.25" SHCS	5	18-8 SS
22	PO375	Boost Cap	1	Aluminum
23	PO386	3 inch sleeve	1	Aluminum
24	PO388	2 inch boost cylinder	1	Aluminum
25	2024N03	3/8-16 locknut	2	316 SS ASTM A194 8MA
26	2201V223	O-ring	1	Viton
27	2505T06	2" Piston seal	1	Teflon/Carbon Fiber
28	2201V012	O-ring, -012	2	Viton
29	PO248	2" O Piston	1	Anodized Aluminum
30	2201V041	O-ring, -041	2	Viton
31	2201V033	O-ring, -033	2	Viton
32	2166F03	Retaining ring	2	18-8 SS
33	2551T10	5/8" Single rod seal/pushing	2	Teflon/Carbon Fiber & Viton
34	AB302	Spool Valve Assembly	2	SS & Buna-N
35	PO380	Piston rod	1	17-4 PH SS
36	2201B045	O-ring, -045	2	Viton
37	1008P02	1/2 NPT Hex socket plug	1	Ni plated brass
38	PO379	Distance piece	1	Aluminum
39	2301A01	Expansion plug	1	Aluminum/SS
40	PO384	4 inch drive cylinder	1	Aluminum
41	2505T02	4" Piston seal	1	Teflon/Carbon Fiber
42	2201B239	O-ring, -239	1	Buna-N
43	PO189	4" O Piston	1	Anodized Aluminum
44	2201B015	O-ring, -015	6	Buna-N
45	2201B010	O-ring, -010	2	Buna-N
46	2201B005	O-ring, -005	8	Buna-N
47	PO377	Air Cap	1	Aluminum
48	PO002	Out label	1	Polyester film
49	2203V015	O-ring, -015	8	Viton
50	1110V02	Cartridge check valve	4	Stainless Steel
51	PO373	Check valve spacer	4	GF Teflon
52	2201V1-7	O-ring, 1 by 7mm	4	Viton
53	PO002	In Label	1	Polyester Film
54	2024H01	3/8-16 by 3/4 Helical	8	316 SS

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONS: ±.001
3 PL DECIMALS ±.0003
ANGLES ±.05°
FRACTIONS ±.1/16
MATERIAL:

SIGNATURES	DATE
DRAWN: RAV	12/11/09
CHECKED:	
ENGRD:	
ISSUED: RAV	12/11/09

Do not install on o-ring groove in check valves. Insert the o-ring into the bottom of the check valve bore and slide the check valve into the bore. Put the spacer on top of the check valve and install the cover.

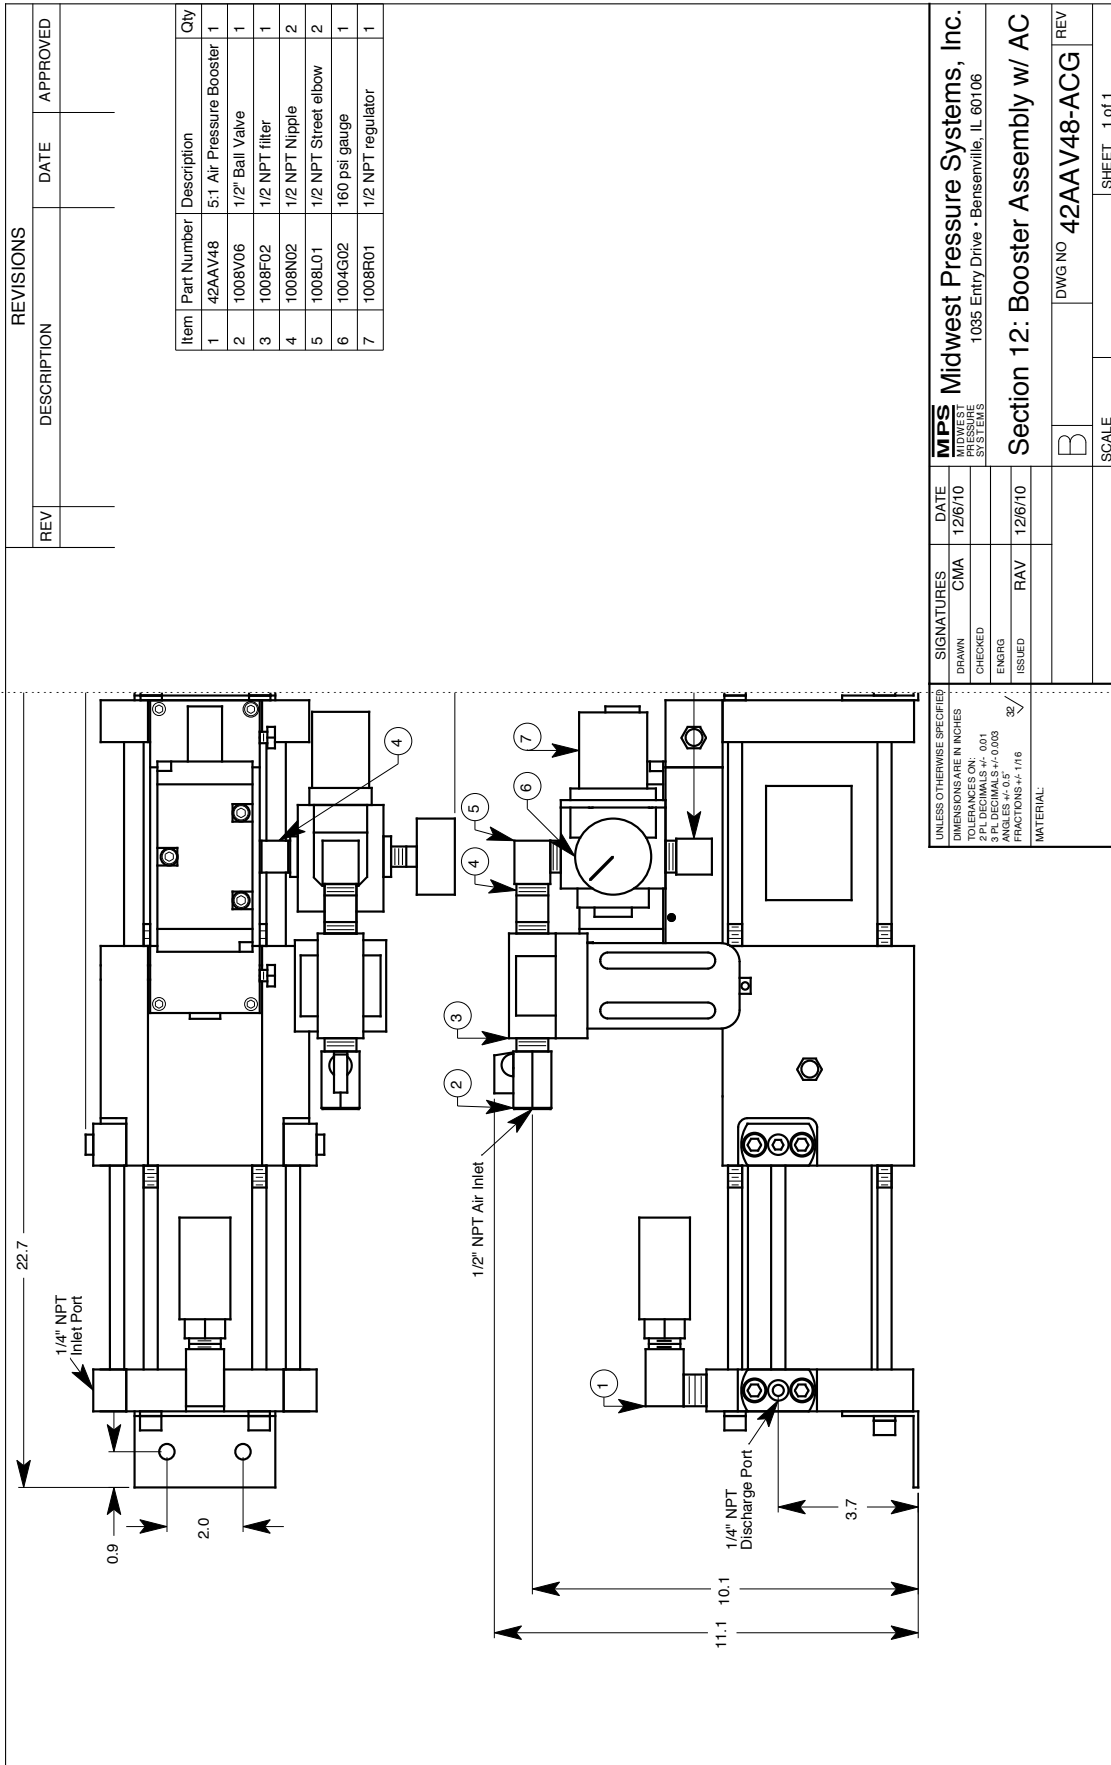

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

Item	Part Number	Description	Qty
1	42AAV48	5:1 Air Pressure Booster	1
2	1008V06	1/2" Ball Valve	1
3	1008F02	1/2 NPT filter	1
4	1008N02	1/2 NPT Nipple	2
5	1008L01	1/2 NPT Street elbow	2
6	1004G02	160 psi gauge	1
7	1008R01	1/2 NPT regulator	1

MPS Midwest Pressure Systems, Inc.
 MIDWEST PRESSURE SYSTEMS
 1035 Entry Drive • Bensenville, IL 60106

Section 12: Booster Assembly w/ AC

DWG NO **42AAV48-ACG** REV **B** SCALE SHEET **1 of 1**

SIGNATURES	DATE
DRAWN CMA	12/6/10
CHECKED	
EMERG	
ISSUED RAV	12/6/10

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES
 TOLERANCES ON:
 2 PL DECADES ± .001
 2 PL DECIMALS ± .003
 ANGLES ± .05°
 FRACTIONS ± 1/16

MATERIAL